

sunpura

FLEXIBLE-LIGHT PANEL KIT P200FL-BK

200Wp*4

3.3KG

Ultra Light / Pcs

~200°

Bendable

SAVE 50%

Installation Costs



P200FL-BK



IP68

The system is capable of withstanding rain, water mist, splashes, and other water-related hazards; as well as suitable for different outdoor applications to ensure stable operation



Flexibility and Durability

World leading non-glass impact resistant technology with bendable surfaces



Ultra Light

Lightweight frameless design, the weight is only 3.3 kg, which is up to 70% lighter than conventional glass module



Easy Installation

Without traditional brackets and limitation of installation surface, it can save up to 50% of installation costs



Certificates & Warranty



5 years Product Warranty

Quality system: ISO 9001: 2015



Extreme Weather Resistant

Organic composite encapsulation materials instead of heavy glass for lamination encapsulation, durable and weather resistant

Technical Parameters

PANEL MODEL	SAT-200-F8MP 200W
-------------	-------------------




Module Electrical Data (STC)

Max Power (W)	200
Max Power Voltage Vmp (V)	15.30
Max Power Current Imp (A)	13.10
Open Circuit Voltage Voc (V)	18.55
Short Circuit Current Isc (A)	13.70
Module Efficiency (%)	19.17

*STC (Standard Test Condition): Irradiance 1000W/m , Cell Temperature 25°C, Air Mass 1.5
*Measurement Tolerance (±3.0%)

Temperature Ratings	Mechanical Parameters
Power Tolerance (W)	0~+5
Temperature Coefficients of γPmp (%/°C)	-0.35
Temperature Coefficients of βVoc (%/°C)	-0.25
Temperature Coefficients of αIsc (%/°C)	+0.050
Max Over-Current	20A
NOCT (Nominal Operating Cell Temperature)	41±2°C
Working Condition	
Max System Voltage (V)	1000V DC
Operating Temp (°C)	-40~+85
Application Class	Class II
Cell Type (mm)	Monocrystalline silicon cell 182*91
No. of Cells and Connections	54(9x2x3)
Dimensions (LxWxH) (mm)	1140x915x3
Backsheet	Black PV Backsheet /Original White
J-Box	IP68
Output cables	Photovoltaic Technology Cable 4.0mm ²
Cable Length (mm)	450, can be customized
Weight (kg)	3.3kg
Connector	MC4 compatible
Container 40'HQ (pcs)	620/container

Dimensions of PV Module(mm)	Packaging Information
-----------------------------	-----------------------

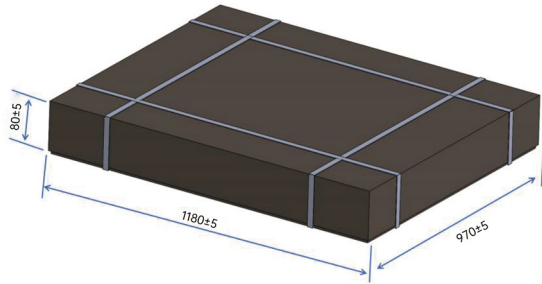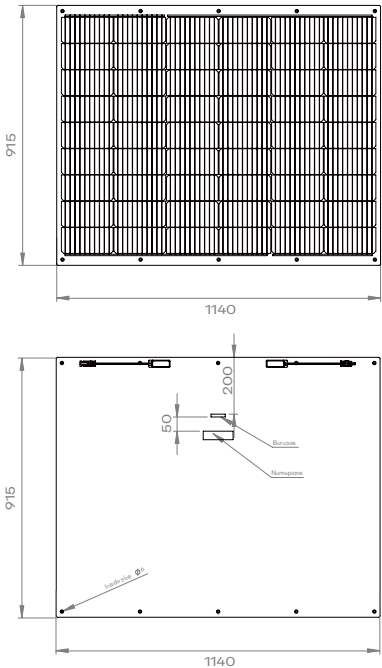

4 x 200Wp Solar Panel



4 x 3m MC4 Cable



1 x Labor Protection Gloves



1 x Anti-dropping Rope



45 x Stainless Steel Cable Tie

*Sunpura reserves the right to final interpretation. _202609_V2_EN